


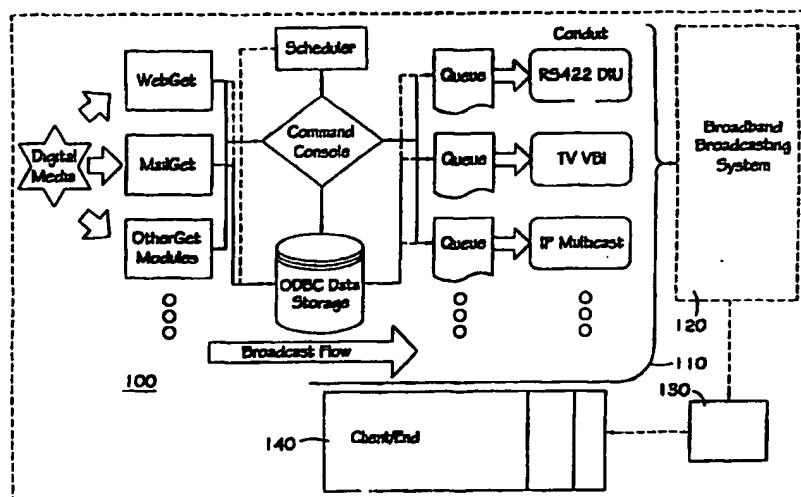

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/24	A1	(11) International Publication Number: WO 00/64177
		(43) International Publication Date: 26 October 2000 (26.10.00)
<p>(21) International Application Number: PCT/IB00/00605</p> <p>(22) International Filing Date: 13 April 2000 (13.04.00)</p> <p>(30) Priority Data: 60/129,754 15 April 1999 (15.04.99) US</p> <p>(71) Applicant: SKYSTREAM CORPORATION [CA/CA]; Suite 250, 1294 Balmoral Street, Thunder Bay, Ontario P7B 5Z5 (CA).</p> <p>(72) Inventor: DOUGALL, Christopher, J., Scott; 300 Wade Circle, Thunder Bay, Ontario P7B 6K5 (CA).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: **DATA BROADCAST SYSTEM**

(57) Abstract

A data communication system and method that wirelessly broadcasts the full content of digital network source information to a user is accomplished by software tools that content source, schedule, and transmit and receive computer-type digital information over a broadband broadcast medium—the data communication system is independent of any broadcast hardware, and can be used to schedule the broadcast of many different services, such as standard files, web sites, program guide and rotating files, by IP-Multicast, RS422, RS232, and TCP/IP communications capable of broadcasting via conduits that comprise television VBI, radio subcarrier, satellite (DSS, DVB), MPEG-2, paging networks, telephone networks, local area networks, and the Internet at the same time. The file contents are sent in pieces (or packets) to a broadcaster hardware in a data stream, that are formatted for being reconstructed into files by the client receiver.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DATA BROADCAST SYSTM

5

RELATED APPLICATIONS

This patent application claims the benefit of U. S. Provisional Patent Application Serial No. 60/129,754 filed April 15, 1999.

FIELD OF THE INVENTION

10

The present invention relates to broadcast systems that include transmission of digital information with existing audio/video broadcasts. More particularly, the present invention relates to broadcast systems that include transmission of digital information with existing audio/video broadcasts by utilizing software tools that source, schedule, and transmit and receive computer-type digital information over a broadband broadcast medium.

15

BACKGROUND OF THE INVENTION

20

The need to provide information to the public continues to challenge the information provider and has created numerous industries that includes radio, and television industry to present day Internet provider of on-line services utilizing telephone lines to carry the signals that contain the information. Accordingly, information is provided to the public utilizing wireless communication technology, or by utilizing wired (cable) communications technology for providing the on-line services. The Internet, no doubt, via the World Wide Web (WWW), is a major source of information for the public. Although the personal computer has been an excellent tool to use as a means that facilitates getting information to individuals, the digital form of the information content used by the personal computer devices has been limited to utilization of on-line services via modem devices.

25

The audio/video industry, utilizing wireless broadcast technology, provides a excellent way of communicating information to the public. However, in present day working environments, traditional audio/video equipment are not provided as part of the work-place tools. If the audio/video equipment is provided, it is provided for entertainment purposes.

30

The broadcast signals utilized by audio/video equipment do not include the digital signal information, such as the digital signal information transmitted by on-line services. Computer devices, on the other hand, have included audio/video peripheral equipment as part of the

computer hardware multi-media componentry, and include digital signal receiving means for converting the on-line audio/video digital signal transmissions into audible and viewable information.

5 The need for systems that combine the benefits of multimedia, wireless and wired on-line services has been recognized in U.S. Patent No. 6,021,433 to Payne et al. The Payne et al. patent teaches a data communication system that connects on-line networks with on-line and off-line computers and broadcasts the notification centric portions (headlines) of available network information. A computer user receives notification that there is an incoming message concerning the headlines. The Payne et al. patent further teaches that wirelessly
10 broadcasted URLs, in the form of headline containing data packets, are provided for being used to obtain detailed data. While, the '433 patent has provided a data communication system for delivering network source headline messages utilizing wireless broadcasting, narrowcasting, and pointcasting, a need is seen for a data communication system and method that wirelessly broadcasts the full content of the network source information, not merely notification about the
15 content that requires further action by the user to retrieve the details of the information.

Accordingly, a primary object of the present invention is to provide a data communication system and method that wirelessly broadcasts the full content of digital network source information to a user.

SUMMARY OF THE INVENTION

20 The foregoing primary object of providing a data communication system and method that wirelessly broadcasts the full content of digital network source information to a user is accomplished by software tools that content source, schedule, and transmit and receive computer-type digital information over a broadband broadcast medium. The data communication system of the present invention, commercially known as Jetstream, and
25 marketed by Skystream Corporation of Thunder Bay, Ontario, Canada (formerly known as Varuna Software Inc.) has a TCP/IP based communications layer that enables the suite of applications to be run across a local or wide area network. This layer also enables the system to be scaled to any size of operation, from one computer, to a large network of computers. The software tools comprise a server/head end, herein referred to as the Jetstream Server/Head
30 End (Suite), a client/end user end, herein referred to as Jetstream Client/End, and a data stream

format, herein referred to as Jetstream Stream Format. The Jetstream Server Suite is a group of integrated software applications, designed and tested to run on a personal computer operating system, such as the commercially available Microsoft Windows NT 4.0 operating system. This set of server end applications is used to facilitate the scheduled gathering and transmitting of the full content of digital information from a source, such as the WWW network source. The present invention comprises the following modules:

Server/Head End

- An application program, herein referred to as JetWeb, used for retrieving Internet information, and storing it locally.
- An application module, herein referred to as JetQueue Module, used for transmitting scheduled services, that supports IP-Multicast, RS422, RS232, and TCP/IP communications, capable of broadcasting via conduits that comprise television, VBI, radio subcarrier, satellite (DSS,DVB), MPEG-2, paging networks, telephone networks, local area networks, the Internet.
- An application module, herein referred to as Control Center, used to schedule tasks for the external modules, all other modules can be remotely controlled from the command center, allowing centralized organization of tasks and services.
- An application program, herein referred to as JetMonitor, resident on all Jetstream systems, utilized to issue and respond remote commands and report on the status to remote modules.

Client/End User End

- An application program, herein referred to as Jetstream Client, for decoding and receiving the full content broadcast data that makes the full content information available to a computer desktop by storing files, caching web sites, and opening streams (sockets).
- An application program, herein referred to as Jetstream Program Guide, used by the user to select which services to receive, or to view the schedule of incoming services, and to look at a catalog of what has been received, it also contains a rotating information (advertising) banner.

The data communication system of the present invention, utilizes an industry standard ODBC

database (supports MSAccess, Informix, SQLServer, Intrabase, ORACLE, etc.) for centralized scheduling and storage of data on a computer hard disk media. This allows the data to be integrated into the existing back office of the customer easily and efficiently. The data communication system of the present invention is designed to be independent of any broadcast hardware, and can be used to schedule the broadcast of many different services, such as standard files, web sites, program guide and rotating files, over many different media at the same time. The service files are sourced by a module source (Fetchd) which in turn transmits the files to a broadcaster's hardware. The file contents are sent in pieces (or packets) by Jetqueue to a broadcaster hardware in a data stream, herein referred to as Jetstream Packet, which are formatted in a format, herein referred to as Jetstream Stream Format. The Jetstream Packet also comprises header information. By example, a web site service type is sourced by a sourced module, herein termed JetWeb Module, which establishes a connection to the specific web site, downloads the web sites files (similar to a Web Browser) , parses the received HTML, looking for any referenced element and fetches this as well. The website service files are packetized and then sent to the broadcaster's hardware as determined by JetQueue Module, for being received by a client.

Other features of the present invention are disclosed or are apparent in the section entitled, "DETAILED DESCRIPTION OF THE INVENTION."

BRIEF DESCRIPTION OF DRAWINGS

For a better understanding of the present invention, reference is made to the accompanying drawings wherein:

Figure 1.0 is a block diagram representation of the content-based data communication system of the present invention, illustrating a server/head end, a broadband broadcasting system and a client/end user end.

Figure 2.0 is a flow diagram illustrating a content-based packet construction process in accordance with the present invention.

Figure 3.0 is a diagram representation of a content-based packet, illustrating header byte and data byte allocations, in accordance with the present invention.

Figure 4.0 is a block diagram illustrating a server/head end object hierarchy for server operation in accordance with the present invention.

Figure 5.0 is a block diagram representation of the server/head end JetQueue Control Center, illustrating interaction of selected system components, such as the Jetserver window, for monitoring and controlling transmission of scheduled content-based digital data communication services.

5 Figure 6.0 is an exemplary JetQueue Control Center computer display window of Queue Properties illustrating general status information about transmission of scheduled services, in accordance with the present invention.

10 Figure 7.0 is an exemplary client/end computer display window illustrating a program guide inventory of available services, herein referred to as Jetstream Program guide, in accordance with the present invention.

Figure 8.0 is an exemplary client/end computer display window illustrating a program guide inventory and status of subscribed services, herein referred to as Jetstream Program guide, in accordance with the present invention.

15 Figure 9.0 is an exemplary client/end computer display window illustrating on/off control of a broadcast receiver for receiving services, herein referred to as Jetstream Broadcast Receiver, in accordance with the present invention.

20 Figure 10.0 is an exemplary client/end computer display window illustrating an on-status of the on/off broadcast receiver services feature, including a pop-up window about viewing other options, herein referred to as Jetstream Broadcast Receiver, in accordance with the present invention.

Figure 11.0 is an exemplary client/end computer display window illustrating an a view of statistics of broadcasted receiver services as selected from a pop-up window shown in Figure 10.0, herein referred to as Jetstream Statistics, in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

25 Figure 1.0 shows an overview representation of the content-based data communication system (Jetstream) 100 in accordance with the present invention. As illustrated, content-based data communication system 100 comprises a server/head end 110, a broadband broadcasting system 120 and a client/end user end 130/140. Jetstream 100 is a data broadcast system and to that end server/head end 110 facilitates a broadcaster to add transmission of digital
30 information to their existing audio/video broadcast. Server/head end 110, and a client/end

user end 130/140 comprise software tools that source, schedule and receive the digital information transmitted by the broadcaster.

The Jetstream 100 software tools are based on the concepts of services, modules and jobs. Services are defined as a logical grouping of computer files, modules are defined as a program that performs a specific task to the files of a service, and jobs control timing of when a module performs its assigned task. Services include by example, a standard file, which are an unrelated grouping of files, a web site service which are files that make up a WWW site, program guide services, which are files used to update the client program guide listing and rotational file services, which are unspecific related grouping of files. A broadcaster decides what services to create and transmit. Modules include fetch modules transmit modules, and combination fetch and transmit. Fetch modules, include webget, also referred to as Jetweb, and are utilized for updating the files within a service to add/delete/modify files. see generally Figure 1.0. Fetch modules also includes modules such as getmail, also shown in Figure 1.0. Transmit modules are modules such as JetQueue, that forward all files within a service to the broadcaster hardware designed to perform the actual signal broadcast to clients. JetQueue is the main transmit module, see generally Figure 5.0. Combination fetch/transmit modules include JetControl module and JetMonitor module. JetControl is a control center module that performs fetch operations on standard files and rotational file services. JetMonitor does not perform any task on a file service, but is used to start and stop modules in a distributed environment. Table 1.0 table breaks down by service type which module sources (fetches) the services files, and which module transmits them to the broadcaster specific hardware.

Service type	Service files are controlled by	Service files are transmitted by
standard file	control center	JetQueue
web site	JetWeb	JetQueue
program guide	JetQueue	JetQueue
rotational file	Control Center	JetQueue

Table 1.0 Service Type/ Module Relationship

Jobs control when a module performs its assigned task to a service. Jobs are scheduled to run at a specific time and date. They are assigned to a service and a module. Jobs may be

either a single job or a repeat job. A single job is scheduled to run once at a specific date/time. A repeat job is scheduled to run at a specific date/time, and to re-schedule itself to run again at a later date/time. By example, a repeat job may be schedule to repeat every two (2) hours. Table 2.0 breaks down by service type and module what happens upon running a service/module pair.

Service type	JetWeb Module	JetQueue Module
Standard file	n/a	Send all files in the service to the broadcaster's hardware.
Web site	Establish a connection to the specific Web site, download the sites files (same as a Web Browser does) parse the received HTML, looking for any referenced element, then fetch those elements as well. Repeat sa per setting of Web services.	Send all files in the service to the broadcaster's hardware.
Program Guide	n/a	Create a file that contains all information regarding available services, and send it to the broadcaster's hardware.
Rotational File	n/a	Select one (only one) file from the service and send it to the broadcaster's hardware.

Table 2.0 Service type/Module Pair Run Results

At the Client/end user end the software tools comprise two main applications with several support tools. The main client application tools are JetStream Broadcast Receiver, which listens for incoming streams of data sent by JetQueue, and JetStream Program Guide

which provides a GUI to client operations, manages service subscriptions, displays broadcast schedules and displays active operations from the receiver. The broadcast Receiver runs continually in the background, displaying a small glyph in the icon tray. The Program Guide can be started and started at will and does not need to be operating for signal reception.

5 JetStream 100 works by breaking the full content of the files into smaller pieces (packets) adding some header information to each packet and sending the file packets to the client. The client/end user software reassembles the packets into the original files. The core of all JetStream broadcasts is the broadcasted JetStream Packets, which contain the full content of the digital data information from the services discussed above and which distinguish the present invention from other related teachings, such as U.S. Patent No. 6,021,433 to Payne et al. The following Table 3.0 describes a JetStream packet in accordance with the present invention.

Stream Number	Multiple Jobs can be active on JetQueue at one time, Stream Number determines for the client which job this packet is from.
Packet Number	Within a stream, each packet is numbered, so the client can determine if any packets have been lost during transmission, a common occurrence.
15 Packet size	the size of the data block
Content	(see Table 4.0)
Data	Data is interpreted based on content
Sync Byte	a special byte indicating the end of the packet

Table 3.0 JetStream Packet

20 The following Table 4.0 breaks down Content vs. Data within a JetStream Packet.

Content Value is	Then Data portion of Packet Contains
JS_JobBegin	Details of a new job starting, its service code, job name, etc
JS_EntryBegin	Details of a new file starting, file name, URL data, expected size
JS_EntryData	actual file contents
25 JS_EntryEnd	indicator that the current file entry has been completed

JS_JobEnd	indicator that the current job has completed
-----------	----------------------------------------------

Table 4.0 Packet Content vs. data

Table 5.0 shows as an example a job run for a standard file service. The standard file includes three files that are less than 1 Kbytes (file1.txt, file2.txt, and file3.txt). JetQueue begins a job run on the standard service and sends the packets to the client.

5

10

15

20

Packet Sequence is: (a JetStream packet is created on this content)	Signifies to the Client
JS_JobBegin (with unique Stream Number)	Transmission of the file service has begun on this Stream Number
JS_EntryBegin (beginning send of file1.ext)	Open for reception file1.ext
JS_EntryData (contents of file1.ext)	save data block to file1.ext
JS_EntryEnd (end of send for file1.ext)	close file1.ext
JS_EntryBegin (beginning send of file2.ext.)	Open for reception file2.ext
JS_EntryData (contents of file2.ext.)	save data block to file2.ext
JS_EntryEnd (end of send for file2.ext.)	close file2.ext
JS_EntryBegin (beginning send of file3.ext.)	Open for reception file3.ext
JS_EntryData (contents of file3.ext.)	save data block to file3.ext
JS_EntryEnd (end of send for file3.ext.)	close file3.ext
JS_JobEnd (completion of job on this Stream Number)	all files received for this service

Table 5.0 Example of sending a packet sequence

25

Figure 2.0 shows a process 200 for breaking down files into packets generally shown as packet 300 in Figure 3.0. The packet construction process 200 begins a step 201 where memory is allocated in a data storage, such as an ODBC data storage unit member of Server/Head end 110. The contents of the file are read (not created) at step 202. The file data is then compressed at step 203 using a compression algorithm to reduce the packet size. The

compressed data is then encrypted at step 204 using an encryption algorithm to scramble the packet. Framing is then performed on the encrypted packet at step 205. A trailer is added at step 206 to signal an end of packet (EOP). The desired wrapping is then added at steps 207a, 207b, and 207c, where step 207a denotes a Wrap to NABTS (creates the forward error correction (FEC) bundles, fec rows and header), step 207b denotes Wrap to Null (no wrapper), and 207c denotes Wrap to JPT (JetStream Packet Transport which are portions of a complete JetStream packet, and adds headers). The modified content file is then transmitted to broadcast hardware at step 208 and then the packet is destroyed at step 209 to restore/free-up memory in the storage unit member. Figure 3.0 shows packet 300 as being 127 bytes long, where bytes 0-4 are allocated for header H information and bytes 5-126 are allocated to data. Table 6.0 shows additional details of the packet format of the present invention.

Byte #	Description	Details
0,1,2	Packet Address	3 hamming perfect bytes. Indicates start of a JPT Packet and each byte must be from 0-15 (i.e. 242)
3	Continuity Index	1 hamming perfect byte. Indicates portions of entire JetStream packet this portion os from. Starts at 0, ends when content flag indicates EOP. (wraps from 15 to 0 as required)
4	Content Flag	1 hamming perfect byte, bitmask indicating bit 0-full/filled packet* (padding added?) bit-1-last JetStream packet chunk bit 2,3-Future Fec/CRC details?
5-126	Data Chunk	Clear portion of JetStream packet

Table 6.0 JetStream Packet Format Details

(*Note: Filler data is added as required to the end of the packet. First added character is 0xEA then as many 0x15's as needed to complete the 127 byte JTP packet size.)

Figure 4.0 is a block diagram illustrating a server/head end object hierarchy for server operation in accordance with the present invention. This hierarchy assures encapsulation of all server operations into and out of the database.

Figure 5 illustrates the JetQueue Module that is used for transmitting scheduled services, that supports IP-Multicast, RS422, RS232, and TCP/IP communications, that are capable of broadcasting via conduits, as illustrated in Figure 1.0, that comprise television, VBI, radio subcarrier, satellite (DSS,DVB), MPEG-2, paging networks, telephone networks, local area networks, the Internet to a Client/User end 130/140. The two components of JetQueue are the control Center Midi Window (JetServer Window) and the broadcast service to drive the DLL (JetStream Broadcast Service) to a hardware transmission device. In one embodiment of the present invention Internet Protocol (IP) is used to move data to a wireless gateway, termed DBN. Figure 6.0 shows a computer display window showing the queue (JetQueue) general properties. From this window the server properties are configured. By example configure the route from the queue to an inserter device (serial Rs232, UDP/IP, TCP/IP, etc). The transmission rate in bits per second can also be specified from this window. The broadcast format can also be configured form this window. For example, for satellite (DVB) transmit JetStream with no wrapper. Packet compression can be enabled or disabled.

The client receivers are populated via a Program Guide that contains information about the services available, and which allows a user to elect to receive or ignore the content. The content is saved as files in the storage unit of a user's computer, or is cached into a web browser for publishing the information in the users Program guide. Figure 7.0 shows an exemplary client/end computer display window illustrating a program guide inventory of available services. The program guide originates at the server/head end, at the control center and may include a default set of services which are made available to a user. Similarly, a user may select a file service, the file service is created and filled with the requested files and included as a job in the program guide. A web site service would have to be fetched and transmitted and handled in a similar fashion by the program guide. Figure 8.0 is an exemplary client/end computer display window illustrating a program guide inventory and status of subscribed services. Figure 9.0 is an exemplary client/end computer display window illustrating on/off control of a broadcast receiver for receiving services. Figure 10.0 is an exemplary client/end computer display window illustrating an on-status of the on/off broadcast receiver services feature, including a pop-up window about viewing other options, such as statistics. Figure 11.0 is an exemplary client/end computer display window illustrating an a

view of statistics of broadcasted receiver services as selected from a pop-up window shown in Figure 10.0.

5 The present invention has been particularly shown and described with respect to a certain preferred embodiments and features thereof. However, it should be readily apparent to those of ordinary skill in the art that various changes and modifications in form, material, and design detail may be made without departing from the spirit and scope of the inventions as set forth in the appended claims.

CLAIMS

What is Claimed is:

1. A broadcast system, said broadcast system comprising:

a server-end means for scheduling, gathering and transmitting an entire digital database content of at least one type of digital information service, said server-end means having means for encoding said full-digital data content for being broadcasted; and

5 a client-end means for decoding and receiving the broadcasted full-digital database content and providing the full informational content of said at least one type of digital information services.

2. A broadcast system as described in claim 1, wherein:

said server-end means further comprises communication means for facilitating transmission of said entire digital database content via IP-Multicast, RS422, RS232, and TCP/IP type of communications links for further broadcasting via conduits selected from a group of conduits that comprise television VBI, radio subcarrier, satellite (DSS,DVB), MPEG-2, paging networks, telephone networks, local area networks, and the Internet.

3. A broadcast system as described in claim 1, wherein:

said means for encoding comprises a packet construction means for breaking up an original digital file into smaller digital file pieces and transmits said smaller digital file pieces as a stream of packets; and

5 wherein said client-end means comprises broadcast data receiving means for re-assembling said stream of packets into said original file.

4. A broadcast system as described in claim 1, wherein:

said server-end means further comprises means for retrieving and storing an entire digital informational content of a selected electronic network site.

5. A broadcast system as described in claim 1, wherein:

said server-end means further comprises a means for providing a program guide of

services for use by a user, said program guide facilitating means for selecting which services to receive, means for viewing the schedule of incoming services, and means for reviewing a catalog of what services have been received, said program guide means further providing a rotating information banner.

6. A contents-based digital data broadcast system, said system comprising:

a first server-end application program means for retrieving a first type of digital information, and storing a entire contents of said digital information locally;

5 a first server-end application module means for encoding, transmitting scheduled services including said entire contents of said digital information, said first application module comprising means for supporting IP-Multicast, RS422, RS232, and TCP/IP communications and means for broadcasting said encoded entire contents of said digital information via conduits that comprise television, VBI, radio subcarrier, satellite (DSS,DVB), MPEG-2, paging networks, telephone networks, local area networks, and the Internet;

10 a second server-end application module means for scheduling tasks for external modules; facilitating centralized organization of tasks and services provided to a client;

a second server-end application program means for issuing and responding to remote commands and reporting on a status of a task to remote modules;

15 a first client-end application program means for decoding and receiving the full content of said broadcasted encoded digital information; and

a second client end application program guide means for facilitating selection of which service to receive, viewing a schedule of incoming services, and review of a catalog of what services have been received, said program guide means further providing a rotating information banner.

7. A method for wirelessly transmitting digital information with existing audio/video broadcasts, said method comprising the steps of:

(a) providing a server-end means for scheduling, gathering and transmitting an entire digital database content of at least one type of digital information service, said server-end
5 means having means for encoding said full-digital data content for being broadcasted;

providing a client-end means for decoding and receiving the broadcasted full-digital database content and providing the full informational content of said at least one type of digital information services; and

5 wirelessly transmitting said full digital database content at said client-end means for being manipulated and being used by a subscriber of said digital information services.

8. A method for wirelessly transmitting digital information, as described in claim 7, wherein said means for encoding comprises breaking down files into at least one packet of digital information:

- (a) allocating memory in a data storage unit member of said server-end means;
- 5 (b) reading data contents of a file;
- (c) compressing the read file data;
- (d) encrypting the compressed data;
- (e) framing the encrypted packet; and
- (f) adding an end of packet (EOP) indication to said at least one packet.

9. A method for wirelessly transmitting digital information, as described in claim 8, wherein said method further comprises the steps of:

- (g) wrapping said packet with additional information selected from wrapping options comprising a Wrap to NABTS (creates the forward error correction (FEC) bundles, fec rows and header), a Wrap to Null (no wrapper), and a Wrap to JPT (JetStream Packet Transport which are portions of a complete jetstream packet, and adds headers); and
- 5 (h) destroying an encoded packet after being wirelessly transmitted, said encoded packet being destroyed for purposes of freeing-up memory in the storage unit member.

1/11

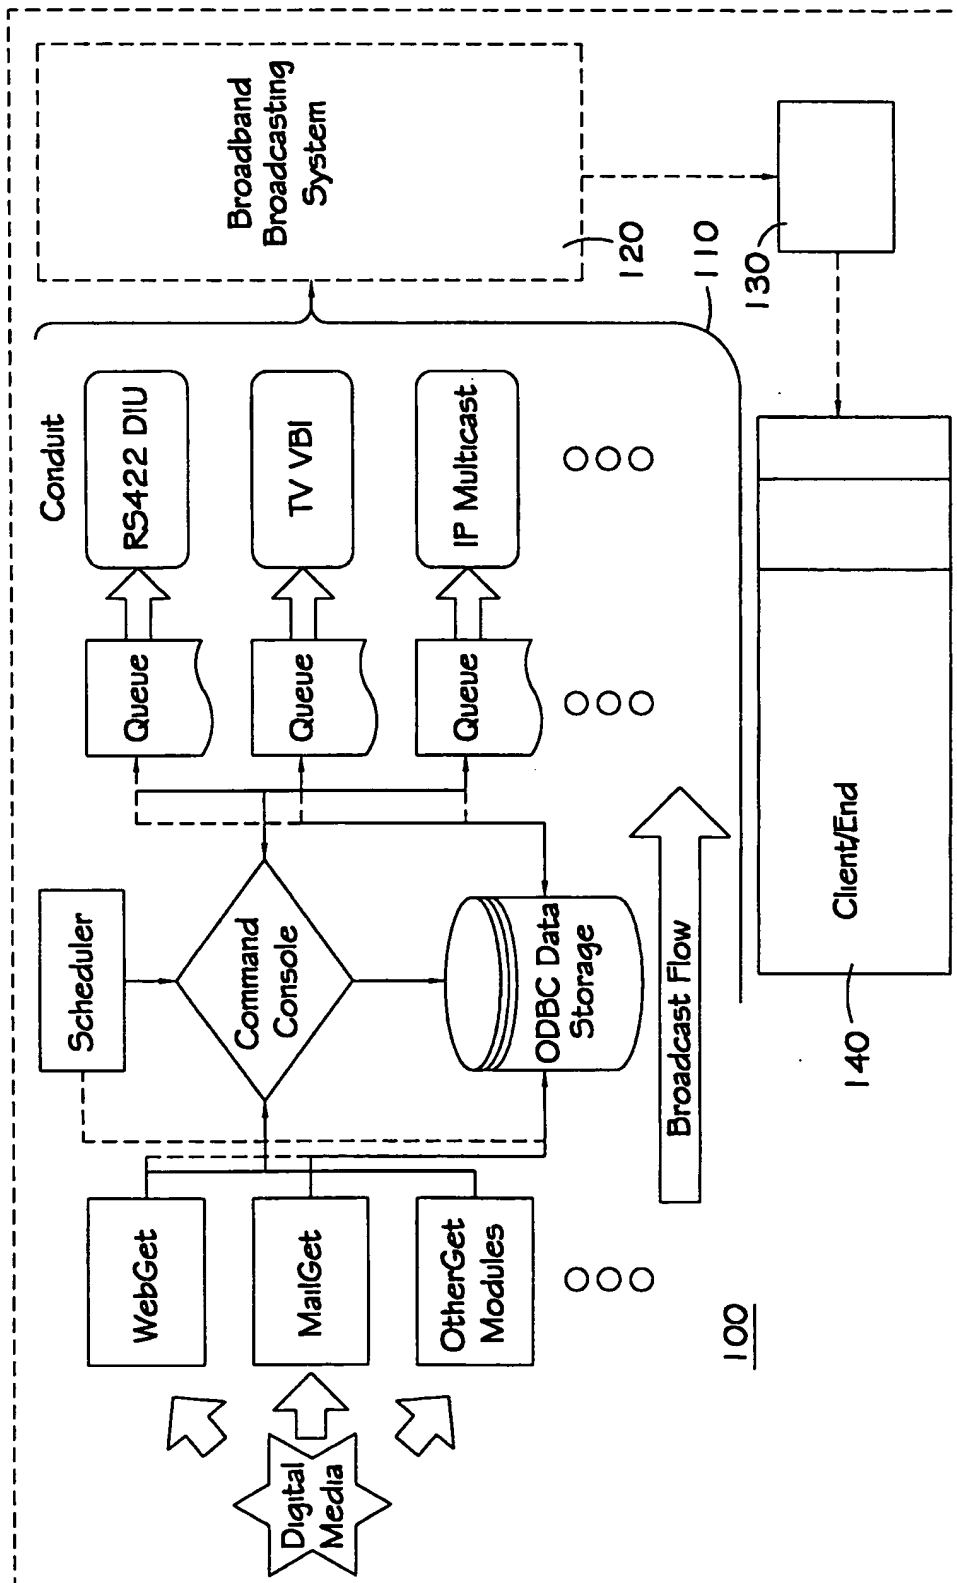


Figure 1.0

2/11




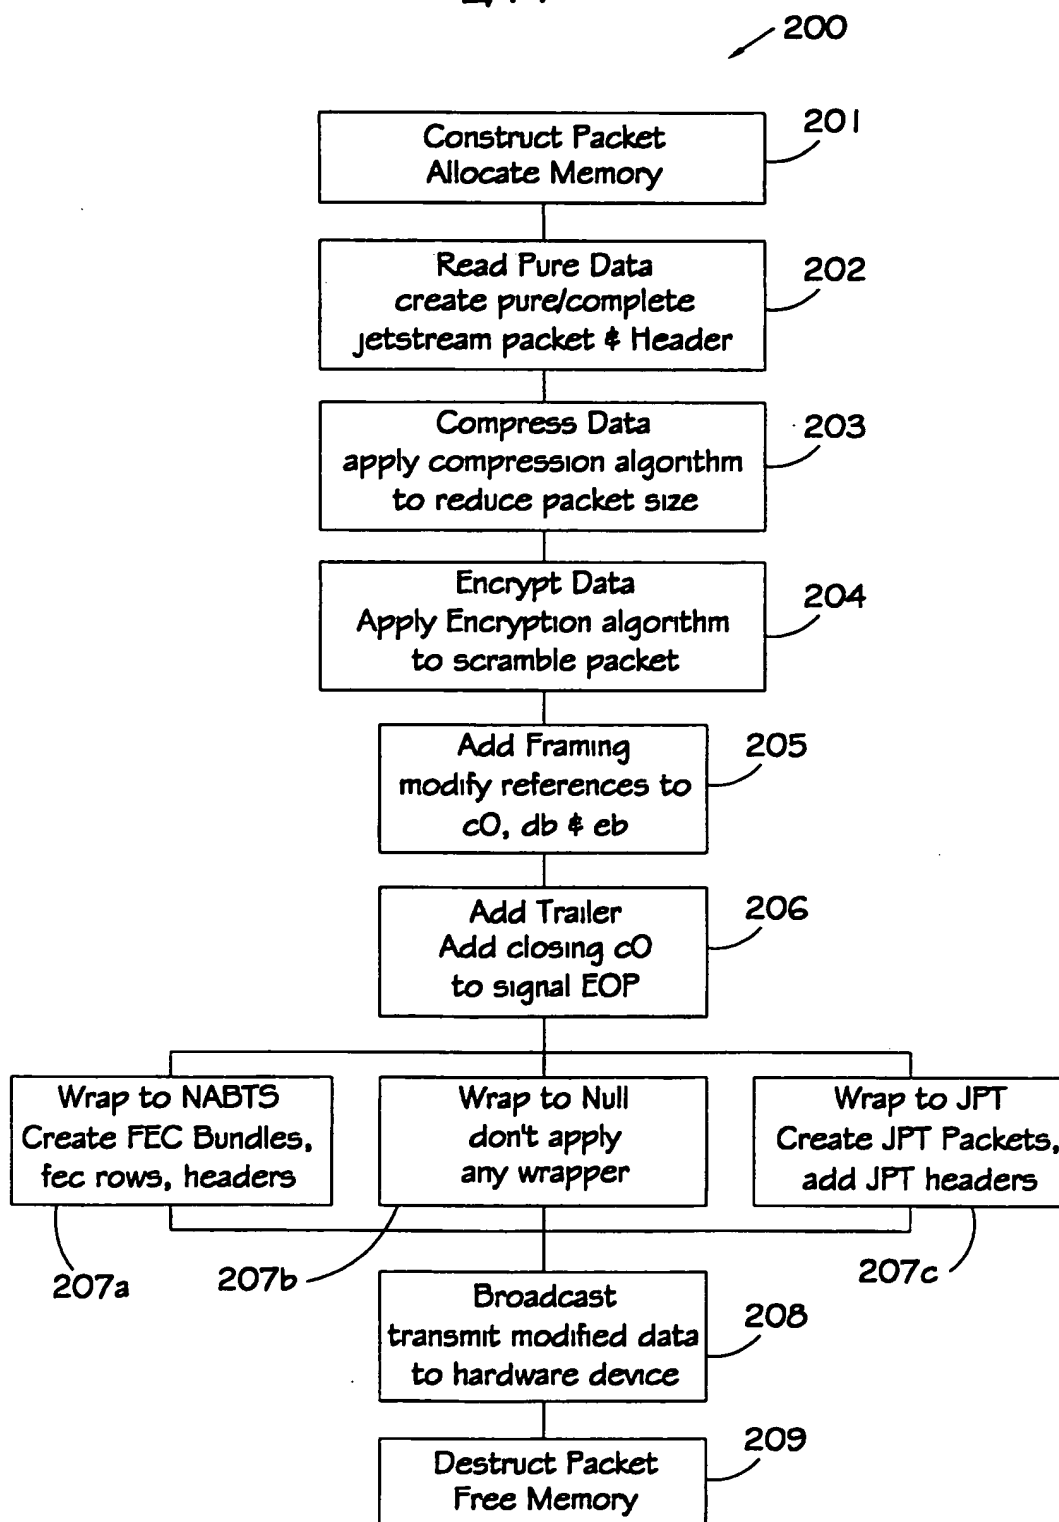


Figure 2.0

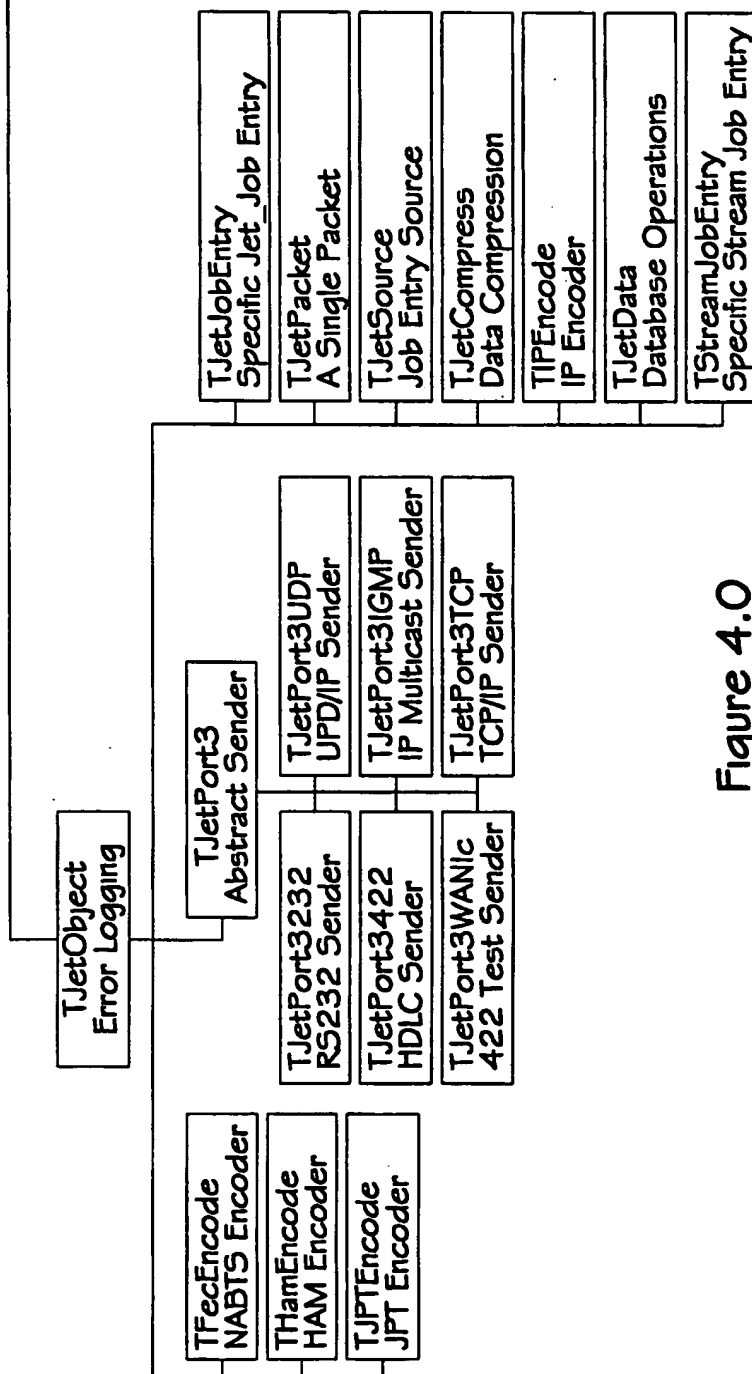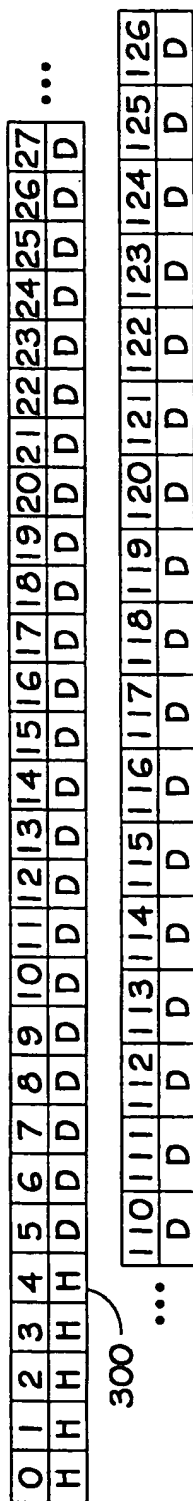

4/11

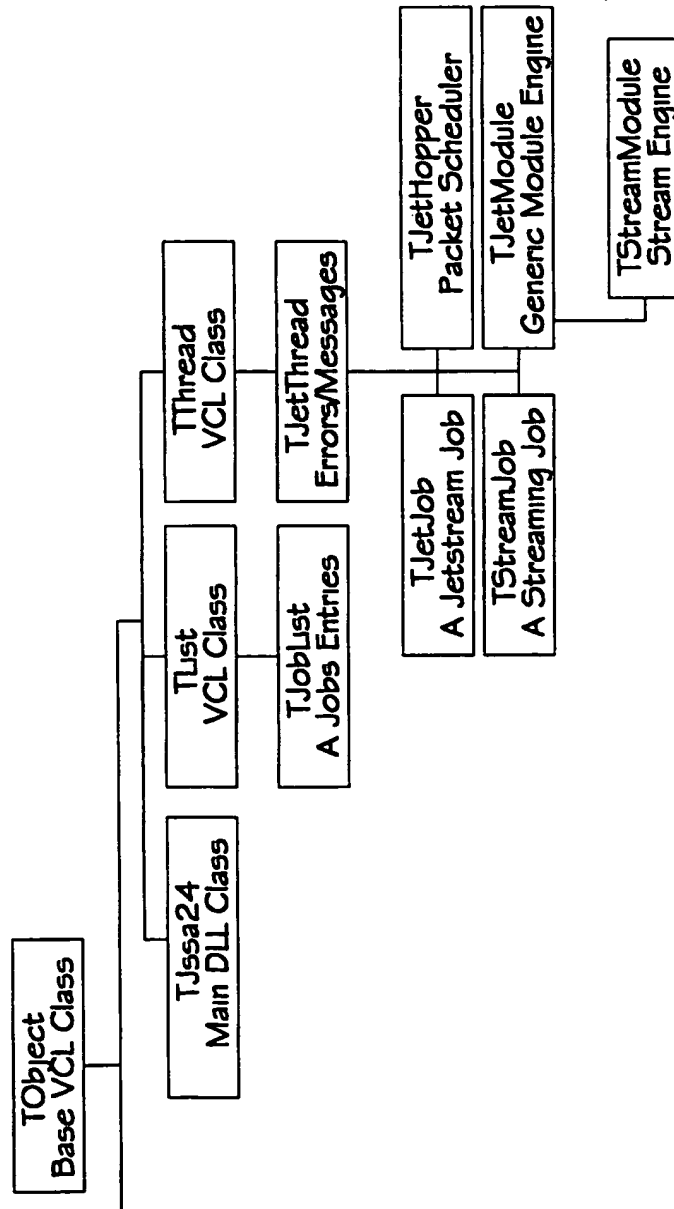


Figure 4.0 Cont.

5/11

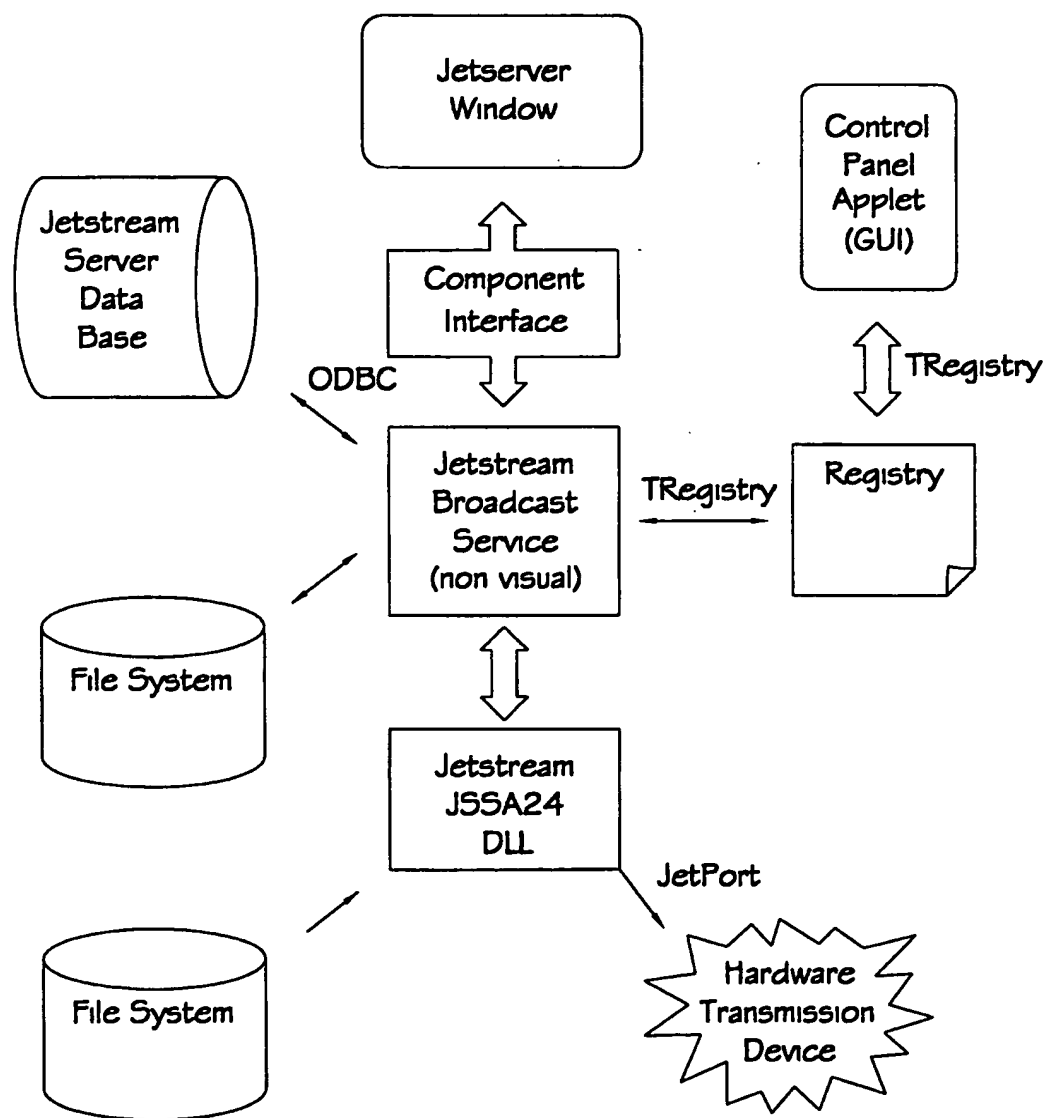


Figure 5.0

6/11

The screenshot shows a Windows-style dialog box titled "Queue Properties" with a close button (X) in the top right corner. The dialog has four tabs: "General", "Server Properties", "Broadcast Properties", and "Command Center". The "General" tab is selected. Inside the dialog, there is a queue icon (a circle with a 'Q') and the name "TQ2". Below this, there is a table of properties:

Machine Name	sunset
IP Address	206.248.137.18
JSSA DLL Version	Version 2.4.1.128
Control Center Status	not connected

Below the table, there is a section for "Event Logging" with the text "Log Events to the" followed by a dropdown menu showing "JetControl" and a checked checkbox, and the text "systems application log". Below this is a section for "Attributes" with a checkbox for "Startup Hidden" (unchecked). Below the checkbox is a "Queue Priority Class" section with a slider bar. The slider bar has three labels: "Normal", "High", and "RealTime". The slider bar is currently positioned at "Normal". To the right of the slider bar is a button labeled "Defaults". At the bottom of the dialog are two buttons: "OK" (with a checkmark icon) and "Cancel" (with an X icon).

Figure 6.0

7/11

Jetstream Program Guide

File

Edit

View

Help

HDTV

Service Name	Type	Next broadcast
<div> Entertainment </div>	File	<input checked="" type="checkbox"/>
<div> MrShowbiz </div>	WWW	<input checked="" type="checkbox"/>
<div> News </div>	File	<input checked="" type="checkbox"/>
<div> CNN </div>	WWW	<input checked="" type="checkbox"/>
<div> Software </div>	File	<input checked="" type="checkbox"/>
<div> RealPlayer </div>	File	<input checked="" type="checkbox"/>

Description

This is the list of Available Services , please check the left box if you wish to receive it
Check the AutoLaunch box to the right if you wish to automatically launch the service upon arrival.

Figure 7.0

8/11

Jetstream Program Guide

Service	Date	Type	Status	%
CNN	N/A	WWW	INCOMING	47
MrShowbiz	3/1/99 11:05:31 PM	WWW	RECEIVED 23 file(s)	100
Program Guide	3/1/99 11:00:07 PM	Progr...	RECEIVED 1 file(s)	100

Inventory

Description

This is the list of services that you have received along with the current status of any incoming services.

Figure 8.0

9/11





 Jetstream Broadcast Receiver			
		 Click to Turn ON/OFF →	
Action	Date/Time		
CacheDude shutting down.	3/1/99 10:53:15 PM		
Receiver shutdown	3/1/99 10:53:15 PM		
Program Guide received, 1 file(s)	3/1/99 10:52:10 PM		
CacheDude performing maintenance.	3/1/99 10:50:57 PM		
CacheDude performing maintenance.	3/1/99 10:48:26 PM		
Program Guide received, 1 file(s)	3/1/99 10:48:01 PM		
Program Guide received, 1 file(s)	3/1/99 10:47:36 PM		
CacheDude performing maintenance.	3/1/99 10:45:56 PM		
CacheDude performing maintenance.	3/1/99 10:43:26 PM		
CacheDude performing maintenance.	3/1/99 10:40:51 PM		
CacheDude performing maintenance.	3/1/99 10:38:18 PM		
CacheDude going to work.	3/1/99 10:35:47 PM		
Jetstream Client Agent, version 2.4.1.463	3/1/99 10:35:47 PM		
Jetstream Broadcast Receiver, version 2.4.1.463	3/1/99 10:35:47 PM		
Idle			

Figure 9.0

10/11

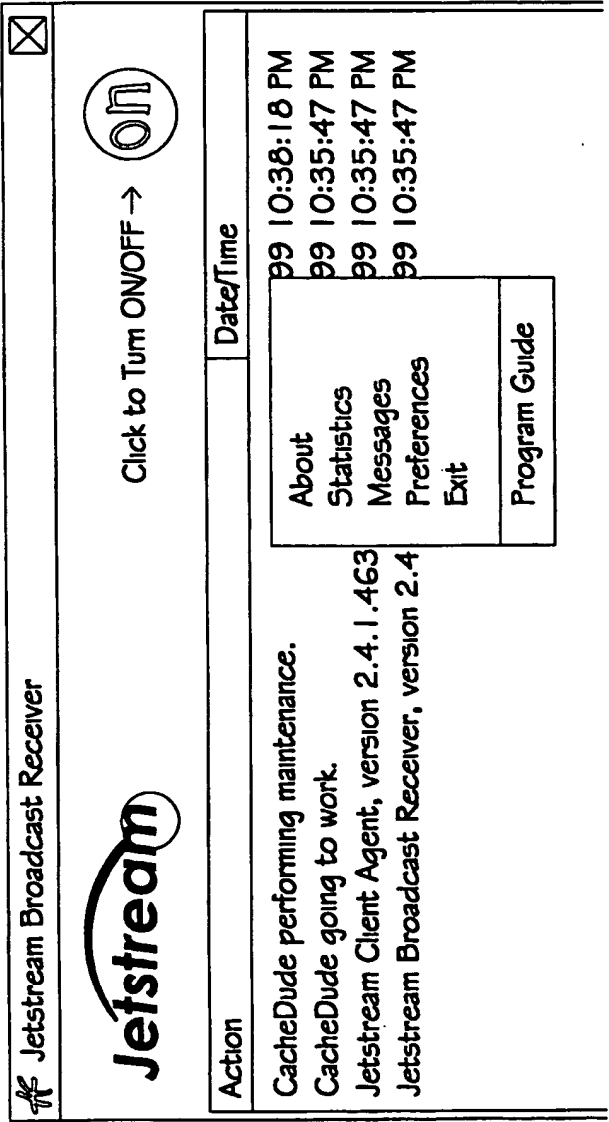


Figure 10.0

11/11

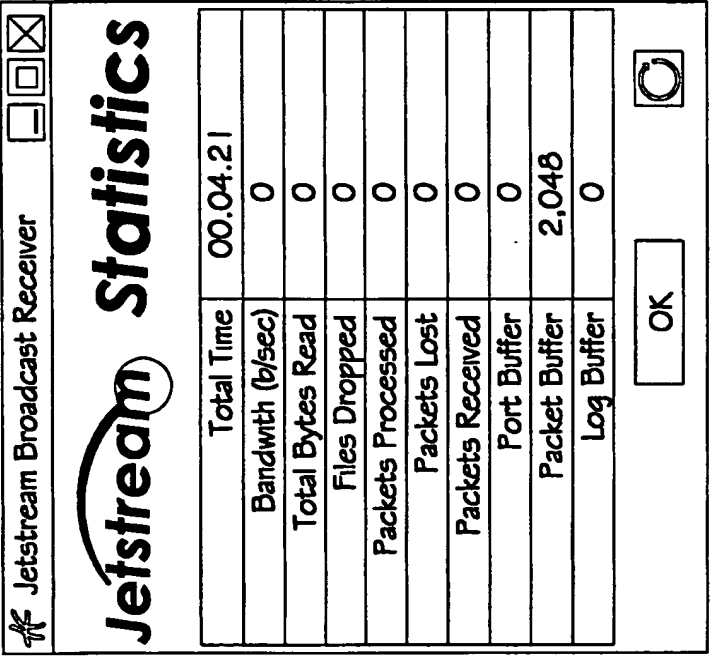


Figure 11.0

INTERNATIONAL SEARCH REPORT

Int. Appl. No.

PCT/IB 00/00605

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 666 645 A (THOMAS ET AL) 9 September 1997 (1997-09-09)	1-7
Y	the whole document	8,9
X	EP 0 680 185 A (THOMSON) 2 November 1995 (1995-11-02)	1,6,7
Y	the whole document	
Y	EP 0 802 677 A (HE HOLDINGS) 22 October 1997 (1997-10-22)	8,9
A	page 4, line 8 - line 10	1,6,7
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

8 document member of the same patent family

Date of the actual completion of the international search

13 September 2000

Date of mailing of the international search report

19/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo rd,
Fax (+31-70) 340-3016

Authorized officer

Dockhorn, H

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/IB 00/00605

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CARDUCCI F ET AL: "ISIS PROJECT: AN OPEN PLATFORM FOR MULTIMEDIA INTERACTIVE SERVICES" IEE COLLOQUIUM ON EU S INITIATIVES IN SATELLITE COMMUNICATIONS - FIXED AND BROADCAST, 9 May 1997 (1997-05-09), XP000197766 abstract; figure 3 -----	1,2,6,7
P,X	WO 00 07361 A (MORECOM) 10 February 2000 (2000-02-10) abstract -----	1,6,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 00/00605

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5666645 A	09-09-1997	AU 703839 B	01-04-1999
		AU 5631396 A	18-11-1996
		BR 9604997 A	02-02-1999
		CA 2219021 A	31-10-1996
		EP 0823176 A	11-02-1998
		WO 9634486 A	31-10-1996
EP 680185 A	02-11-1995	US 5819034 A	06-10-1998
		CA 2145899 A	29-10-1995
		CN 1117620 A	28-02-1996
		JP 8166925 A	25-06-1996
		RU 2142158 C	27-11-1999
		SG 28257 A	01-04-1996
		US 5915090 A	22-06-1999
EP 802677 A	22-10-1997	US 5905713 A	18-05-1999
		JP 10051497 A	20-02-1998
WO 0007361 A	10-02-2000	AU 5235099 A	21-02-2000

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.